
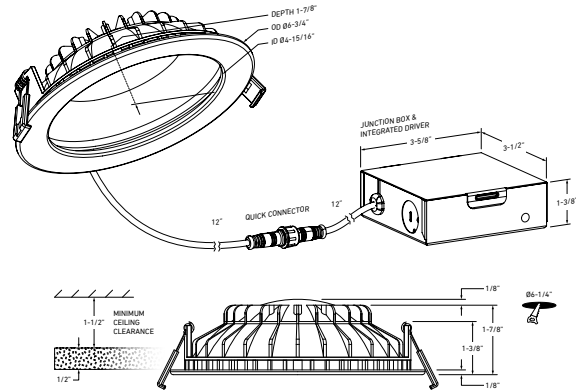


MODEL NAME **IND6-DW-WH**
INDIRECT
6-Inch Indirect Recessed Light

Create the perfect mood when dimming your lights. This is now possible with our Dim to Warm concept, generating a warm, exquisite glow to set the tone for your evening.

PROJECT:	TYPE:
DATE:	QTY:
NOTES:	

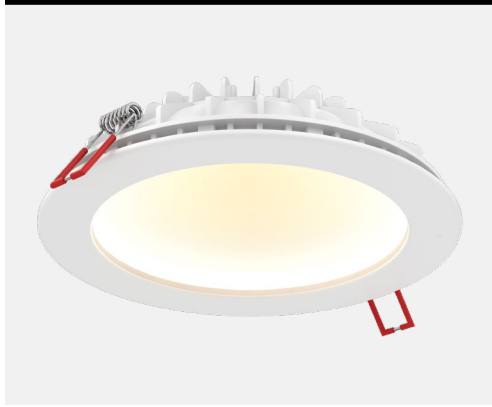


QUICK SPECS

SIZE	WATTS	DELIVERED LUMENS*	COLOR °T	CRI	VOLTAGE	BEAM ANGLE	FINISH
6"	12W	750lm	3000 K - 2200 K	80	120V	110°	○ White

*Lumen output measured at 3000K

LIGHT DISTRIBUTION

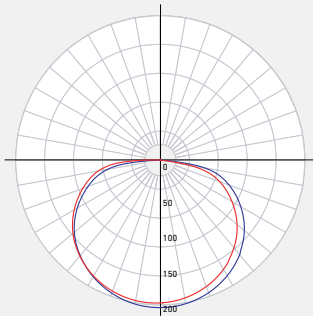

CONSTRUCTION	Lens -	Type of optics Reflector	Type of LED Edge-lit SMD
	Lens material Acrylic	Housing material Cast aluminum	Cut hole size 6-1/4"

RATINGS	Placement Indoor	Lifespan 50,000 hrs.	FT rating FT4
	Location Damp	Certifications ETL, FCC, ICES, IC, ASTM E283-04	Operating temperature -20° to 40° C

WHAT'S IN THE BOX

- LED recessed fixture
- Junction box
- Push-in wire connectors
- Mounting hardware
- Instruction sheet

ACCESSORIES

- [RFP-UNI](#)
Universal Drilling Plate
- [RFP-46](#)
Drilling Plate

ADAPTERS

- [REC-EXT108](#)
108" extension cord for recessed fixtures
- [REC-EXT230](#)
230" extension cord for recessed fixtures



**ELECTRICAL
DETAILS**

Input voltage
100-135V

Output current
330mA

Power factor
98%

Driver type
Constant current

Output voltage
30V

LED model #
2835

**THD harmonic
distortion**
<30%

Binning type
3 SDCM

FEATURES

Every fixture includes a junction box with an integrated driver

Superior LED performance and lifespan

Dim-to-warm technology, dims from 3000 K to 2200 K to mimic incandescent light

Dome reflector

Can be daisy chained

Smooth 360° wide spread

WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to info@dals.com.

RECOMMENDED DIMMER LIST*

BRAND	MODEL #	DIMMER SPECS	GRADE	DIMMING RANGE (%)	MAX LOAD
Dals	SM-DIMSW Smart Dimmer	Triac, 250W LED/CFL	Compatible	Min: 6 / Max: 100	20
Lutron	DVCL-153PR-WH-C	Triac, 150 W Dimmable CFL/LED	Compatible	Min: 6 / Max: 100	12
Lutron	CTCL-153PDH-WH-C	Triac, 150 W Dimmable CFL/LED	Compatible	Min: 6 / Max: 100	12
Lutron	STCL-153PH-WH-C	Triac, 150 W Dimmable CFL/LED	Compatible	Min: 2 / Max: 100	12
Lutron	DVWCL-153PH-WHC	Triac, 150 W Dimmable CFL/LED	Compatible	Min: 6 / Max: 100	12
Lutron	MACL-153MRHW-WHC	Triac, 150 W Dimmable CFL/LED	Compatible	Min: 2 / Max: 100	12
Lutron	DVELV-300P-WH	300W electronic low voltage dimmer	Compatible	Min: 7 / Max: 100	25
Lutron	MA-PRO-WH	ELV, 250W LED/CFL	Compatible	Min: 2 / Max: 100	20
Lutron	Caseta PD-6WCL-WH-R-C	Triac, 300W Dimmable CFL/LED	Compatible	Min: 3 / Max: 100	25
Lutron	Caseta PD-5NE-WH-C	ELV, LED—up to 250 W	Compatible	Min: 4 / Max: 100	20
Lutron	Caseta PD-10NXD-WH	Triac, LED—up to 250 W	Compatible	Min: 2 / Max: 100	20
Leviton	6674	Triac, 150 W Dimmable CFL/LED	Compatible	Min: 8 / Max: 100	12
Leviton	IPL06-10Z	Triac, 150 W Dimmable CFL/LED	Compatible	Min: 12 / Max: 100	12
Leviton	DSL06-752	Triac, 150 W Dimmable CFL/LED	Compatible	Min: 12 / Max: 100	12
Leviton	D26HD-742-1RW	Triac, 300W LED/CFL	Compatible	Min: 9 / Max: 100	25
Legrand	RHCL453PNICCV4	Triac, 450W Dimmable CFL/LED	Compatible	Min: 8 / Max: 100	37
Legrand	ADTP703TUM4	Triac, 450W Dimmable CFL/LED	Compatible	Min: 11 / Max: 100	37
Legrand	RHL373PW	Triac, 250W LED	Compatible	Min: 7 / Max: 100	20
Control 4	C4-APD120-WH	ELV, 120W LED	Compatible	Min: 0 / Max: 100	10
Control 4	C4-FPD120-WH	Triac, 200W LED	Compatible	Min: 0 / Max: 100	16

* Minimal buzzing noise may occur with some dimmers