

Project name:
Fixture type:
Date:

Flexa™ 6" Adjustable Round **Reflector Trim for Koto™ Module**

Mix and match any ring finish with any reflector finish



Features

- 2 Piece Flexa™ trims for maximum design flexibility.
- Convenient twist-lock design for ease of installation.
- Diecast construction for lasting quality.
- O.D.: 7 3/8".

Technical Details

Construction: Precisely spun aluminum reflector with a powder-coated finish.

Installation: Twist-on design allows for easy mounting onto the Koto™ LED Module. Clips securely mount trim into the housing and keeps ring flush with ceiling.

Compatible Module: Koto™ LED Modules (ELK07, ELK09, ELK19, ELK21 Series)

Options







All White

Black with White Ring

All Bronze








Chrome with White Haze with White Ring


Ring

All Black

Dimensions



Side View



Product Number

Item	Finish
ELK629WW	All White

Product Number Builder Example: ELK629WW


Flexa™ 6″ Adjustable Round Reflector	Reflector Finish	Ring Finish
ELK629		
	W White	W White
	B Black	BZ Bronze
	BZ Bronze	B Black
	C Chrome	
	H Haze	

Compatible Products



For use with 6" Koto™ Twist-&-Lock Trims

Koto™ LED Module

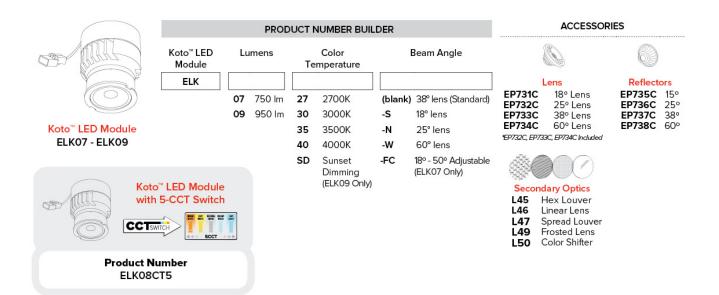

6" Koto™ Dedicated LED ICA Housings



6" Standard ICA Housing New Construction

CAT NO.	SPECIFICATIONS
EL770ICA	71/2" Height
EL760ICA	5 1/2" Height, Shallow



6" Standard Remodel ICA Housing Remodel

CAT NO.	SPECIFICATIONS	CAT NO.
EL770RICA	7½" Height	EL76FICA
EL760RICA	5 ½" Height, Shallow	EL75FICAS



2-Hour Fire Rated 6" ICA Housing
New Construction


CAT NO.	SPECIFICATIONS
EL76FICA	7 ¾" Height - Sound Rated
EL75FICAS	6 3/16" Height, Shallow

Compatible Products



For use with 6" Koto™ Twist-&-Lock Trims

Koto[™] Architectural LED Light Engine

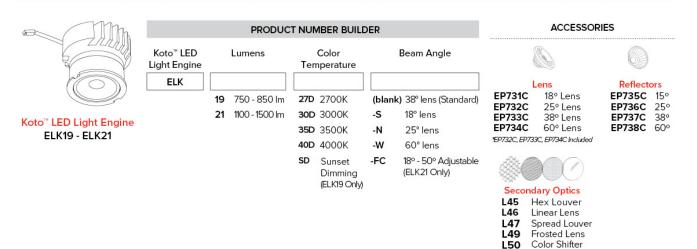

6" Koto™ Dedicated LED ICA Housings



6" Koto™ Maximum Adjustability ICA Housing

New Construction

CAT NO.	SPECIFICATIONS
E6LK37ICA	7 ½" Height, Triac/ELV, 850 (ELK19) - 1100 (ELK21) Im
E6LK38ICAD	7 ½" Height, 0-10V/Triac/ELV, 850 (FLK19) - 1100 (FLK21) lm



6" Maximum Adjustability High Lumen ICA Housing

Double Wall

CAT NO.	SPECIFICATIONS
E6LK43ICA	7 1/4" Height, 120V, Triac/ELV, 1250 lm
E6LK44ICAD	7 ¼" Height, 120/277V, 0-10V/Triac/ELV, 1250 lm
E6LK56ICA	7 1/4" Height, 120V, Triac/ELV, 1500 lm
E6LK57ICAD	7 1/4" Height, 120/277V, 0-10V/Triac/FLV, 1500 lm

