

WAC LIGHTING

Lotos Adj - Fire Rated

Adjustable Downlight 5CCT

Fixture Type: _____
 Catalog Number: _____
 Project: _____
 Location: _____

| Model | Beam | Color Temp & CRI | Lumens | CBCP | Finish |
|--------|------|---|--------|------|------------------------|
| R4ERAR | W 45 | 9CS 2700K/3000K/3500K/4000K/5000K - 90 | 800 | No | FWT White (Fire Rated) |

Example: **R4ERAR-W9CS-FWT**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Fire rated to reduce the spread of flames and maintain the integrity of the ceiling.

FEATURES

- Fire Rated - ASTM E119 and UL 263 tested and certified for 2 hours
- 5-CCT Switchable between 2700K and 5000K
- Multiple LED array for uniform illumination
- Rotatable multi-axis gimbal ring
- Minimum Plenum Space Required: 4 1/2"
- Driver included
- 5 year warranty

SPECIFICATIONS


| | |
|---------------|---|
| Color Temp: | 2700K/3000K/3500K/4000K/5000K |
| Input: | 120-277 VAC,50/60Hz |
| CRI: | 90 |
| Dimming: | ELV: 100-5% ,TRIAC: 100-5% |
| Rated Life: | 50000 Hours |
| Mounting: | Heavy gauge retention clips secures fixture to ceiling |
| Standards: | ETL, cETL,Title 24 JA8 Compliant,Energy Star 2.0 Wet Location Listed |
| Construction: | Steel with frosted TIR lens |



FINISHES:

White
(Fire Rated)

LINE DRAWING:

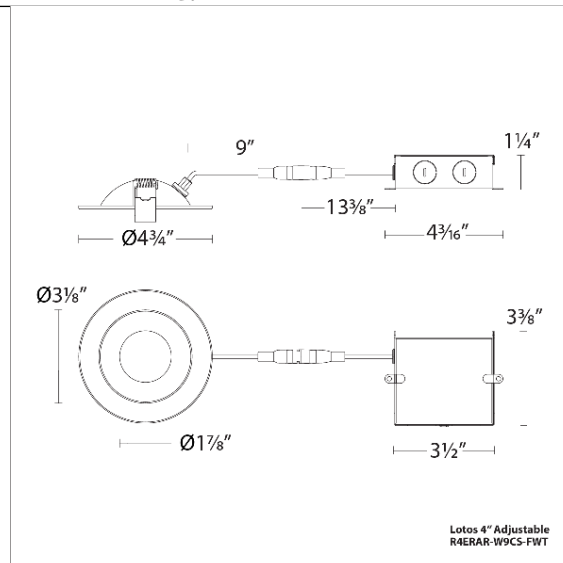

WAC LIGHTING

Lotos Adj - Fire Rated

Adjustable Downlight 5CCT

Fixture Type: _____
 Catalog Number: _____
 Project: _____
 Location: _____

| Model | Beam | Color Temp & CRI | Lumens | CBCP | Finish |
|--------|------|---|--------|------|------------------------|
| R6ERAR | W 45 | 9CS 2700K/3000K/3500K/4000K/5000K - 90 | 1320 | No | FWT White (Fire Rated) |

Example: **R6ERAR-W9CS-FWT**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Fire rated to reduce the spread of flames and maintain the integrity of the ceiling.

FEATURES

- Fire Rated - ASTM E119 and UL 263 tested and certified for 2 hours
- 5-CCT Switchable between 2700K and 5000K
- Multiple LED array for uniform illumination
- Rotatable multi-axis gimbal ring
- Minimum Plenum Space Required: 4 1/2"
- Driver included
- 5 year warranty

SPECIFICATIONS

| | |
|---------------|---|
| Color Temp: | 2700K/3000K/3500K/4000K/5000K |
| Input: | 120-277 VAC,50/60Hz |
| CRI: | 90 |
| Dimming: | ELV: 100-5% ,TRIAC: 100-5% |
| Rated Life: | 50000 Hours |
| Mounting: | Heavy gauge retention clips secures fixture to ceiling |
| Standards: | ETL, cETL, Title 24 JA8 Compliant, Energy Star 2.0 Wet Location Listed |
| Construction: | Steel with frosted TIR lens |



FINISHES:

White
(Fire Rated)

LINE DRAWING:

